



SAMSUNG BUSINESS

The following guide is intended to walk a user through setting a custom homepage on a Samsung LFD with an onboard web browser. You will require the IR remote control, and a USB keyboard is recommended as well, but not required.

1. Power on the LFD.
2. Press **SOURCE** on the IR remote control to bring up the Source Menu.
3. Use the **LEFT** and **RIGHT** arrow keys to highlight **WEB BROWSER** from the Source Menu as shown below.

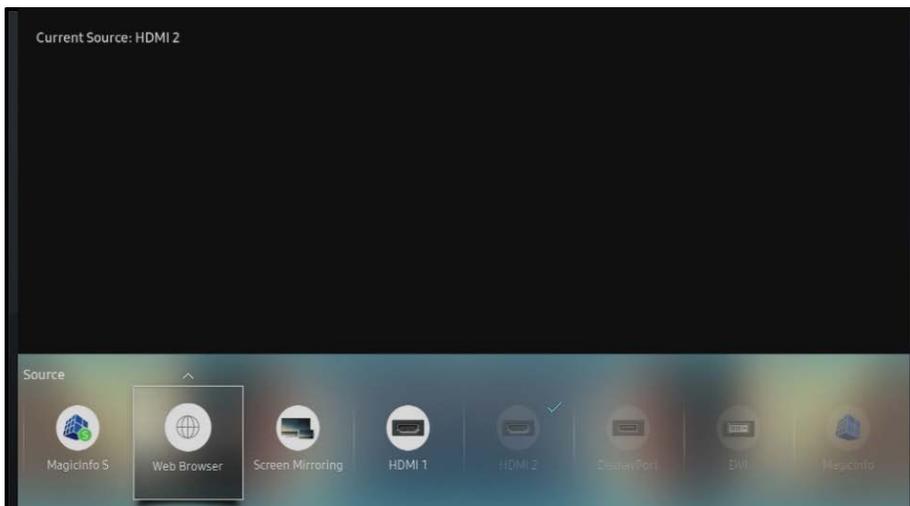


4. Press the **UP** arrow when the Web Browser is highlighted. This will display an options menu.

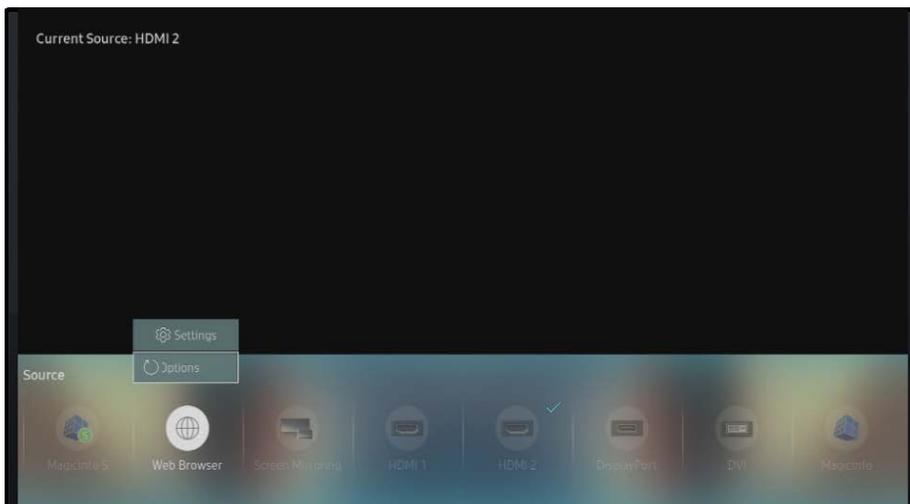


SAMSUNG BUSINESS

5. Use the **DOWN** arrow to highlight **REFRESH OPTIONS** (bottom menu item) and press **ENTER** on the IR remote to select. This will display the Refresh Options Menu as shown below.

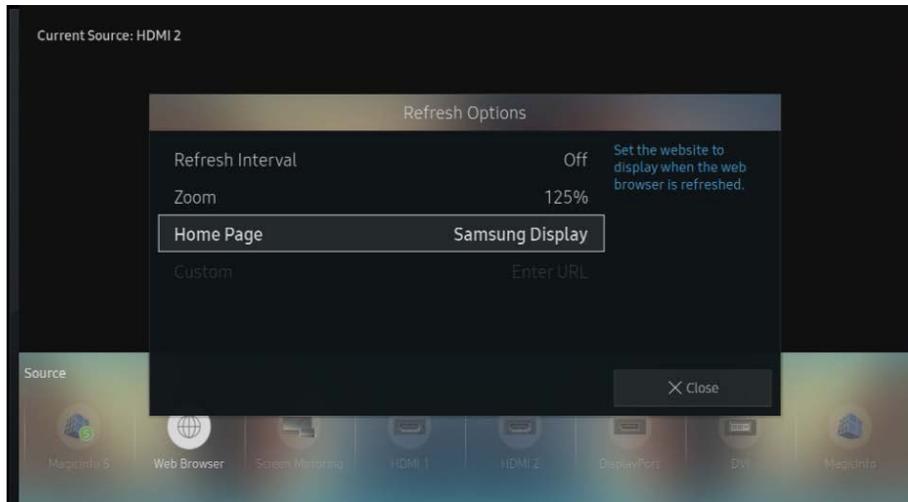


6. Use the **DOWN** arrow key to highlight **HOME PAGE** in the Refresh Options Menu. Press **ENTER** on the IR remote to bring up the home page options.
7. Use the **DOWN** arrow to select **CUSTOM**, and press **ENTER** on the IR remote to change the setting.

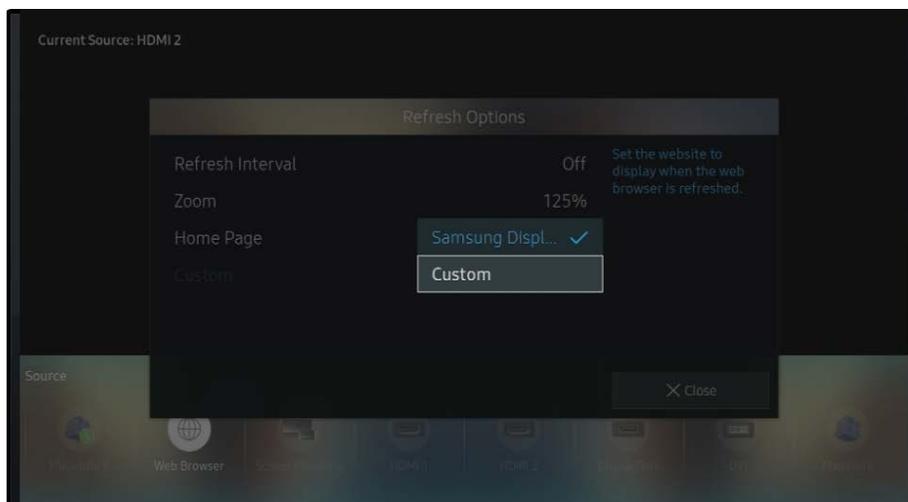


SAMSUNG BUSINESS

- The menu will return to the previous level automatically. Using the **DOWN** arrow, highlight the new menu option, **CUSTOM – ENTER URL** (bottom menu item). Press **ENTER** on the IR remote to select it.

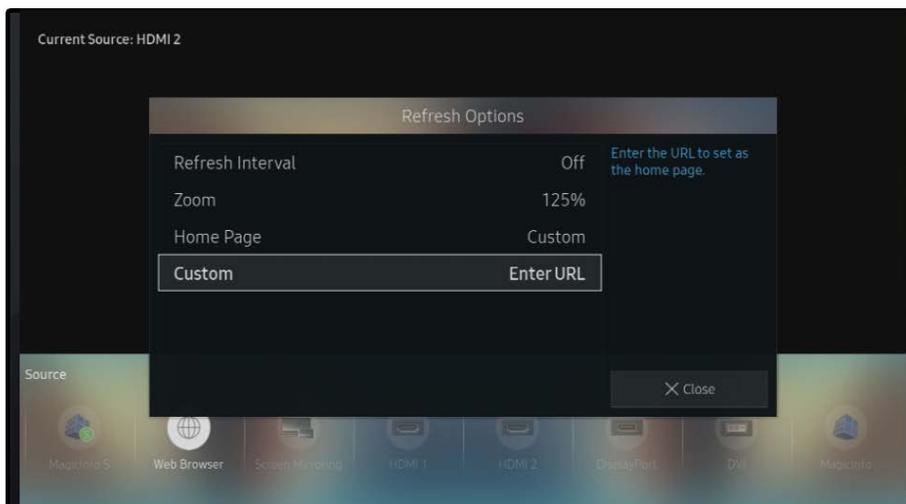


- A menu will appear with a spot to enter the desired website URL, and an on-screen keyboard. You can use the arrow and enter keys from the IR remote to navigate and enter the address or connect a USB keyboard to type in the address.

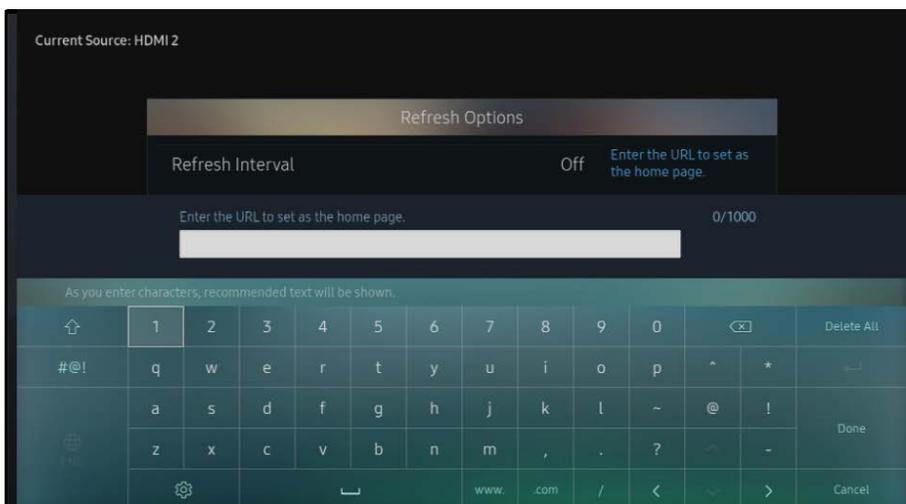

- Once the address has been entered, select **DONE** in the on-screen keyboard (located in the right-hand column, second from the bottom).

SAMSUNG BUSINESS

11. The keyboard will close automatically, and using the arrow keys, navigate to the **CLOSE** menu option in the lower right corner of the Refresh Options menu. Press **ENTER** on the IR remote to close the menu.
12. Now, we can launch the web browser. The **WEB BROWSER** option on the Source menu should be already highlighted. Press **ENTER** on the IR remote to launch it.

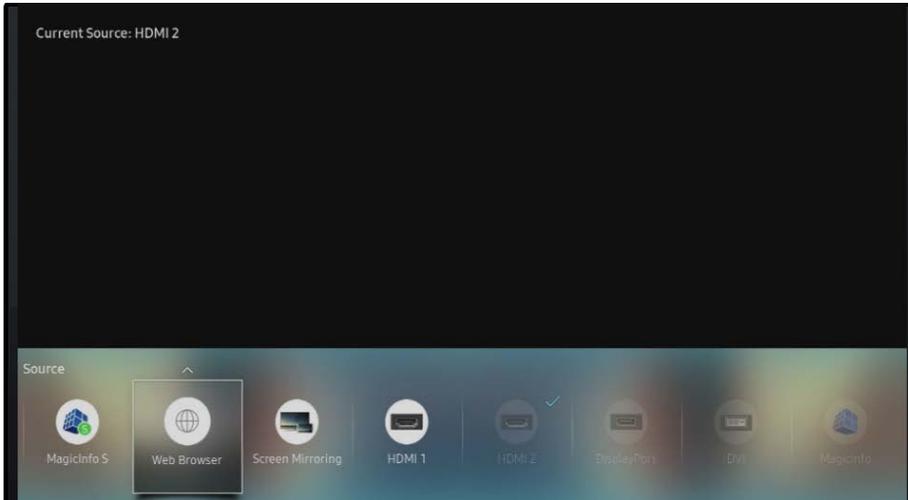

13. Your page will load automatically. The LFD will stay on the Web Browser input even after power off, unless changed by the user.